



## Key Feature

- 2-wire IP distributor
- 6 2-wire cascade interfaces without device power supply
- 8 interface indicators, 1 RJ-45 Interface, 1 Reset button
- Din rail mounting, 24VDC

## Specification

### Device interfaces

Network interface	1 RJ45
Two-wire interface	8(2 for casacading, 6 for device without power)
Signal indicator	8
Power indicator	1
Reset	1


### General

Power supply	24 VDC
Power consumption	NA
Working temperature	-10 ° C to 55 ° C (14 ° F to 131 ° F)
Working humidity	10% to 90%

## Available Model

DS-KAD706Y-S

## Dimension

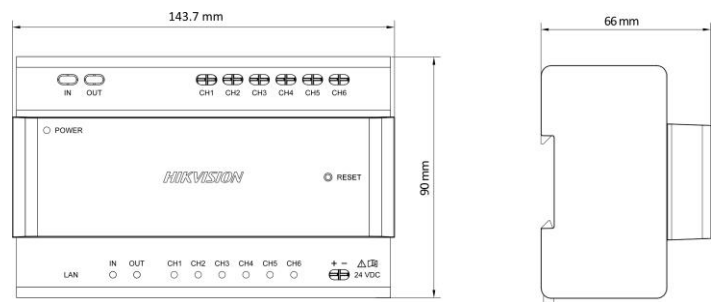

**Headquarters**

No.555 Qianmo Road, Binjiang District,  
Hangzhou 310051, China  
T +86-571-8807-5998  
www.hikvision.com



Follow us on social media to get the latest product and solution information.

